




# Cosmo Striped Mesh

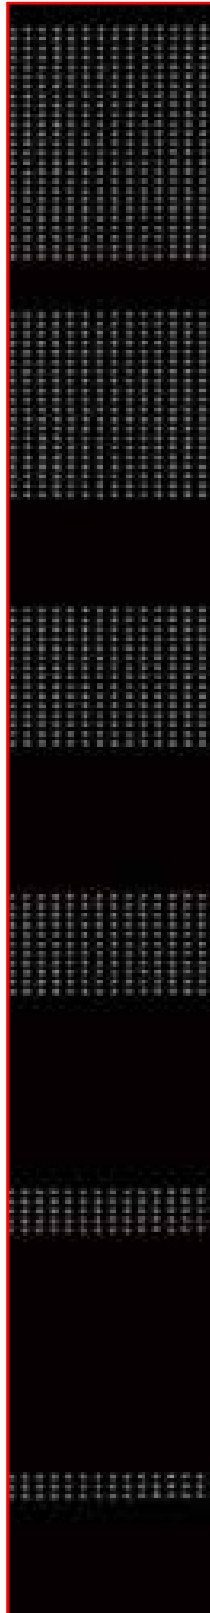


Gray MS2

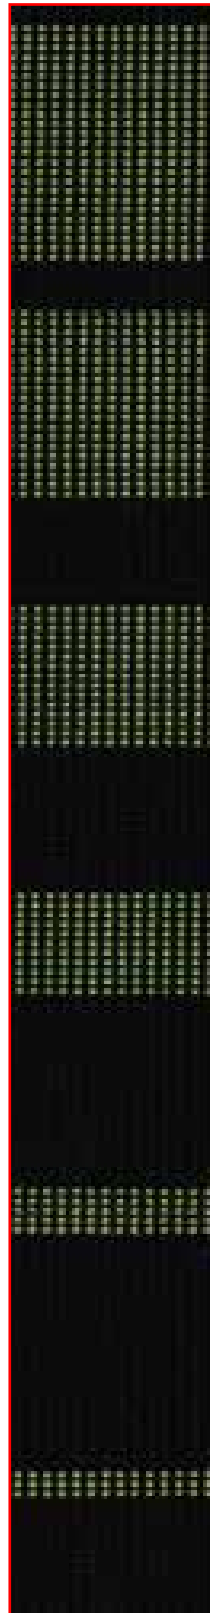

Green MS4

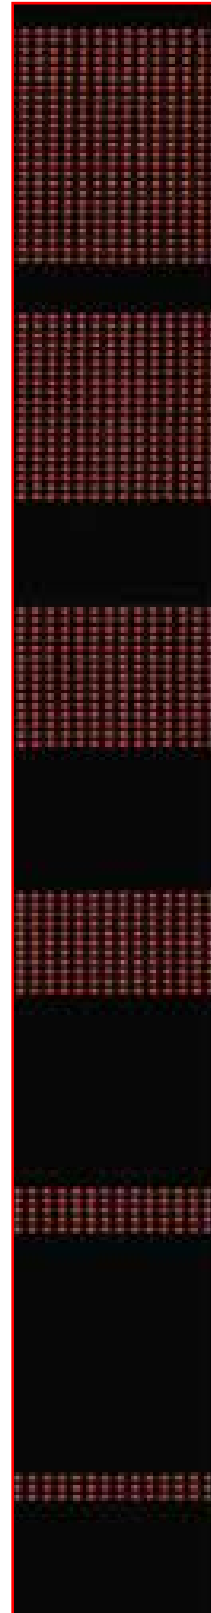

Red MS5

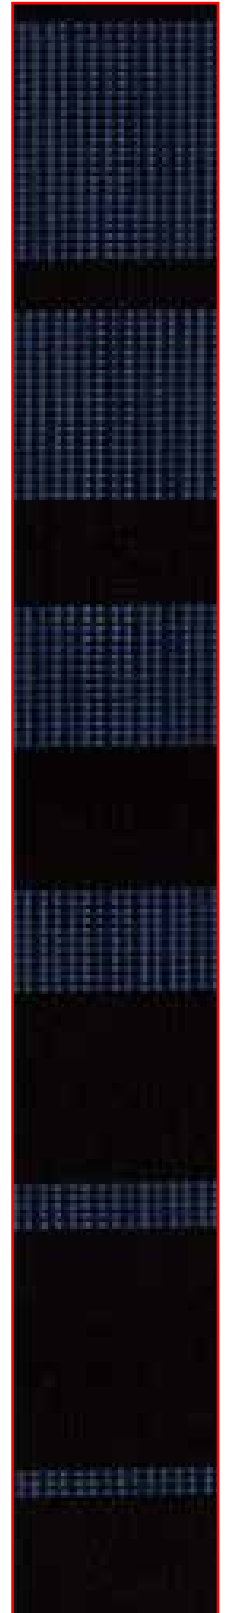

Blue MS6

Pattern: MS Mesh

68% Elastomeric,  
32% Polyester

Abrasion: 100,000  
Double Rubs

Soil and Stain  
Resistant



**EXPRESSSHIP  
FABRICS**

## 9to5 Seating's ExpressShip Mesh Program

**Need it fast?** We have you covered with a wide variety of mesh options in 5 days! Our ExpressShip Program offers expedited delivery on our seating products, now with many mesh options shown here. Product will be completed and ready to ship within 5 business days.

ExpressShip Purchase Orders placed separately ship in 5 business days. If combined with other fabrics the lead time of the fabric with the longest lead time will be used.

# info

<b>Pattern</b>	MS Mesh (Grade M1)
<b>Fiber Content</b>	68% Elastomeric, 32% Polyester
<b>Abrasion</b>	100,000 Wyzenbeek Double Rubs
<b>Applicable ACT®</b>	
<b>Lightfastness</b>	4
<b>Cleaning Code</b>	SW: Water-based cleaning agents, foam or pure-water-free solvents

### Icon Upholstery Definitions



#### Fire Retardancy

Flammable testing determined as fabric's resistance to burning.  
PASSES - California 117



#### Colorfastness To Wet & Dry Crocking

Colorfastness to wet & dry crocking refers to the rubbing off of color from the fabric onto clothing, hands or other materials and can occur under wet or dry conditions.  
PASSES - AATCC 8-1974 Dry Crocking, Class 4 minimum; Wet Crocking, Class 3 minimum.

#### Abrasion

Abrasion is the ability of fabric to withstand damage from wear and rub. This is a general contract specification as well as a heavy duty specification.  
PASSES -



General Contact: ASTM 3579 modified (#10 cotton duck); 15,000 double rubs Wyzenbeek Method



Heavy Duty: ASTM 3579 modified (#10 cotton duck); 30,000 double rubs Wyzenbeek Method or ASTM D4966 (with 21oz. weight); 40,000 rubs Martindale Method



#### Colorfastness to Light

Colorfastness to light is the degree to which fabric will retain its color when exposed to light.  
PASSES - AATCC 16A-1974 or AATC 16E-1976; Class 4 minimum at 40 Hours. NOTE: Class 4 minimum at 60 hours is recommended for direct sunlight exposure situations.



#### Physical Properties

3 Physical property tests include: brush pill test to determine a fabric's pilling. Breaking/tensile strength is the ability of a fabric to withstand tension without breaking or tearing. Seam slippage is the pulling apart of fabrics at the seam.  
PASSES - Brush Pill ASTM D3511, 3-4 minimum. Breaking Strength ASTM D3597-D1682-64 (1975) 50lbs. minimum in warp & weft Seam Slippage ASTM D3597-D434-75 25lbs. minimum in warp & weft.

**9to5**<sup>®</sup>  
seating

3211 Jack Northrop Ave.  
Hawthorne, CA 90250

**PHONE**  
888.925.SEAT

**FAX**  
866.925.SEAT

**EMAIL**  
sales@9to5seating.com

9to5seating.com  
Follow us: @9to5seating

